



# PLASTIC SLATBAND CHAINS

# SPROCKETS



# IDLERS

## Straight Run Double Hinge & LBP

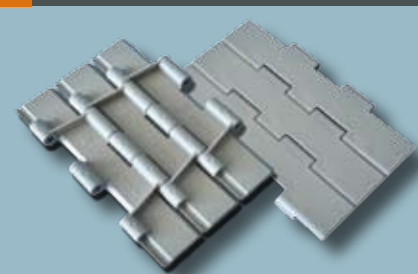

Chain material	Acetal, WRB
Pin material	Stainless Steel hardenend
Plate thickness	4.8mm
Pin diameter	6.35mm
Back flex radius	50mm
Standard length	80 Pitches (10 feet-3.048mm)

Chain ref	Material	Plate Width		Weight kg/m	Working load (max.) N (21°C)	Backflex radius (min.) mm	Plate thickness mm
		mm	inch				
<b>LF - ACETAL</b>							
LFC / 002	Acetal	190.5	7.50	2.50	2680	50	4.8
<b>WEAR RESISTANT BLACK</b>							
LFC / 002	WRB	190.5	7.50	2.50	2680	50	4.8

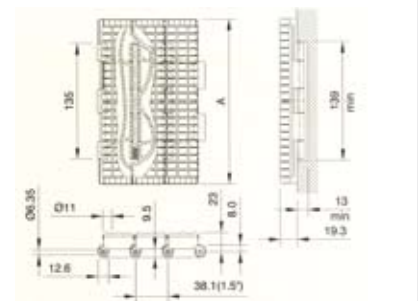
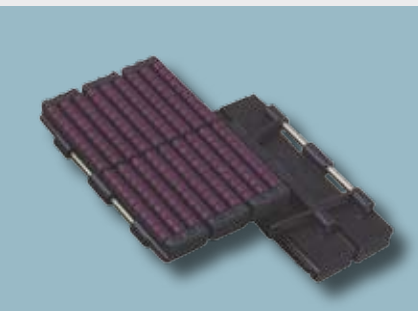


Chain ref	Material	Plate Width		Weight kg/m	Working load (max.) N (21°C)	Backflex radius (min.) mm	Plate thickness mm
		mm	inch				
<b>ACETAL</b>							
LFC / 042	Acetal	190.5	7.50	5.30	2680	400	--

## DOUBLE HINGE SPLIT SPROCKETS



SPK 024

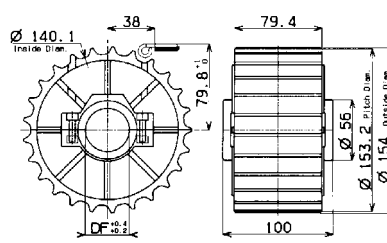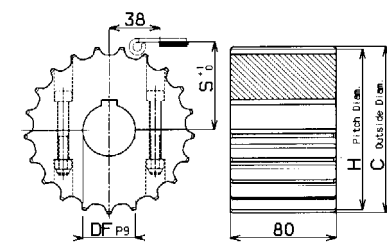


Sprocket type	No of teeth	Bore	Pitch diam. H	Outside diam. C	Width	Hub width	Hub diam.
		mm					
SPK / 011 / 25	17	25	105.47	103.9	80	80	
SPK / 011 / 30	17	30					
SPK / 011 / 35	17	35					
SPK / 011 / 40	17	40	117.34	117.0	80	80	
SPK / 011 / 45	17	45					
SPK / 012 / 25	19	25					
SPK / 012 / 30	19	30	129.26	129.0	80	80	
SPK / 012 / 35	19	35					
SPK / 012 / 40	19	40					
SPK / 012 / 45	19	45	141.21	142.0	80	80	
SPK / 013 / 25	21	25					
SPK / 013 / 30	21	30					
SPK / 013 / 35	21	35	153.2	154.0	80	56	
SPK / 013 / 40	21	40					
SPK / 013 / 45	21	45					
SPK / 014 / 25	23	25	153.2	154.0	100	56	
SPK / 014 / 30	23	30					
SPK / 014 / 35	23	35					
SPK / 014 / 40	23	40	153.2	154.0	100	56	
SPK / 014 / 45	23	45					
SPK / 015 / 25	25	25					
SPK / 015 / 30	25	30	153.2	154.0	100	56	
SPK / 015 / 35	25	35					
SPK / 015 / 40	25	40					
SPK / 015 / 45	25	45	153.2	154.0	100	56	
SPK / 024 / 25	25	25					
SPK / 024 / 30	25	30					
SPK / 024 / 35	25	35	153.2	154.0	100	56	
SPK / 024 / 40	25	40					
SPK / 024 / 45	25	45					

## 7.5" DOUBLE HINGE IDLER



IDL 006  
IDL 003

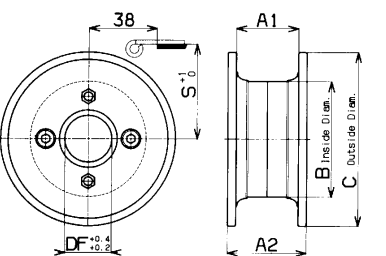

Idler type	No of teeth	Bore	Pitch diam. B	Outside diam. C	Outside Width A2	Inside width A1	Chain height
		mm					
IDL / 006 / 25	21	25	99	128.0	163.0	140.0	68.6
IDL / 006 / 30	21	30	99	128.0	163.0	140.0	68.6
IDL / 006 / 35	21	35	99	128.0	163.0	140.0	68.6
IDL / 006 / 40	21	40	99	128.0	163.0	140.0	68.6
IDL / 003 / 25	25	25	99	155.0	163.0	140.0	80.5
IDL / 003 / 30	25	30	99	155.0	163.0	140.0	80.5
IDL / 003 / 35	25	35	99	155.0	163.0	140.0	80.5
IDL / 003 / 40	25	40	99	155.0	163.0	140.0	80.5